

SIMPLIPHI YOUR POWER WITH THE **LITTLE GENNY** EMERGENCY POWER KIT

A Truly Portable, Hand-Carried AC Power Supply For

- Disaster Relief
- Communications
- Military/Expeditionary
- Outdoor Enthusiasts

In any remote situation where immediate access to off grid AC Power is critical, the Little Genny is there for you!



PORTABLE EMERGENCY POWER SUPPLY AT HOME, WORK OR ON-THE-GO
The Little Genny™ Emergency Power Kit is a portable, rechargeable battery-powered generator of AC power. It stores electricity from any power source — grid, solar, wind — when access to AC power is not available, such as power outages and emergencies. It is a silent, non-toxic, cobalt-free power supply that can be used anytime, anywhere to charge cell phones, tablets, laptops, fans, lights small appliances, and many other types of portable equipment for years of reliable use.

Little Genny™ EK

Little Genny™	
Voltage Output	115-120 VAC/60 Hz
Capacity	296 Wh/23 Ah
Output	300 Watts AC
Connectors	(2) USB outlets for 5 VDC (2) AC Outlets
Memory Effect	None, recharge anytime
Operating Temp	32° to 104°F (0° to 40°C)
Charge Retention	<1% loss per month
Charge Cycles	2,500
Standard Charge Time	5 hours
Charge Input	12.8 VDC
Solar Input	12 to 18 VDC up to 15A
Warranty	5 years on battery system



DIMENSIONS: 13 x 11 x 7 inches (33 x 28 x 18 cm) **WEIGHT:** 12 lbs (5 kg)


- Meets transport safety weight requirements: Less than 35 kg including packaging
- UN 3480, Lithium Ion batteries, 9, II
- UL and CE listed, UN/DOT and RoHS compliant components
- Designed and built in California, USA
- Phone, phone charger, and laptop not included

Power Unplugged. Anytime. Anywhere.™



420 Bryant Circle | Ojai, CA 93023, USA | +1 (805) 640-6700 | SimpliPhiPower.com

SIMPLIPHI YOUR POWER WITH THE **LITTLE GENNY** EMERGENCY POWER KIT

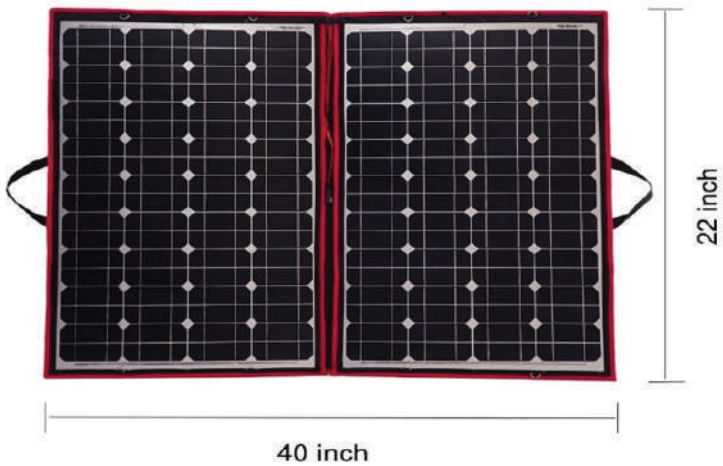

80W Portable Solar Panel

Voltage Output	12 VDC 5 Volt USB
Peak Output	80 Watts AC
Output Current (Imp)	4.44 Amps
Short Circuit Current (Isc)	4.60 Amps
Open Circuit Voltage	21.6 VDC
Folded Dimensions	22 x 20 x 0.4 inches
Opened Dimensions	40 x 22 x 0.2 inches
Net weight	4.8 lbs / 2.2 kgs
Solar Output	18 VDC / 4.4 ADC
Connectors	Standard Barrel Connector USB-A Port

- Monocrystalline Solar Cell
- High efficiency conversion rate to maximize the use of available sunlight
- CE Approved

Power Unplugged. Anytime. Anywhere.™