

4.9  
kWh

**SIMPLI PHI™**  
Battery



The **Simpli PHI™ 4.9 kWh Battery** utilizes advanced Lithium Ferro Phosphate (LFP) chemistry to deliver more efficient, safer and reliable energy storage. Designed and built with versatility in mind, the Simpli PHI 4.9 kWh Battery seamlessly integrates with all leading inverters, making it an ideal solution for battery replacement, expansion of existing systems or as a new installation. This leading-edge power storage solution is also at the core of the Energy Storage System (ESS): the most advanced, safety-certified ESS available for homes and businesses.

## FEATURES



### Long battery life

10,000 cycles at 80% depth of discharge (DoD), 96% round-trip efficiency, 26.8 MWh of energy throughput, with 80% retained capacity.



### Scalable for any energy need

Battery can scale to allow for expansion up to 358 kWh for longer-duration storage.



### Flexible to pair with leading inverters

Ready to be integrated with Simpli PHI, Sol-Ark and SMA. Other inverters pending.



### LFP battery chemistry

Provides peace of mind by reducing cobalt, risk of thermal runaway with fire propagation, operating temperature constraints and toxic coolants.



### Broad operating temperature

Ability to be used in a variety of temperature ranges.



### Maintenance-free

No ventilation, cooling or thermal regulation required; 10-year limited warranty.<sup>1</sup>



### Versatile installation options

IP65 rating supports all weather conditions for both indoor or outdoor installations.



### Validated to industry's toughest safety standards

UL 1642, UL 1973, UN 3480 and UN DOT 38.3.



### Closed-loop communication

Optimizing the inverter performance with ongoing feedback between the elements of the system.



### Proven overcurrent protection

Integrated BMS and 100A DC breaker on/off switch protects the battery from overcharge and discharge, increasing safety during installation and operation.

<sup>1</sup>See operator's manual or [BRIGGSandSTRATTON.com](http://BRIGGSandSTRATTON.com) for complete warranty details.

# 4.9

kWh

**SIMPLI<sup>PHI</sup>**  
Battery




| Battery Specifications                 |   |
|--|---|
| Model Number                           | SPHI-B-4.9  |
| DC Voltage - Nominal                   | 51.2 VDC  |
| Amp-Hours                              | 97 Ah   |
| Rated kWh Capacity                     | 4.9 kWh DC @ 100% DOD<br>3.9 kWh DC @ 80% DOD                                     |
| Max. Surge Discharge Rate (10 minutes) | 100 amps DC (5.1 kW DC)   |
| Max. Continuous Discharge Rate         | 48.5 amps DC (2.48 kW DC)   |
| Max. Continuous Charge Rate            | 48.5 amps DC (2.48 kW DC)   |
| DC Voltage Range <sup>1</sup>          | 48 VDC to 56 VDC  |
| Depth of Discharge <sup>1</sup>        | up to 100%  |
| Charging Temperature <sup>1</sup>      | 32° to 120° F (0° to 49° C)   |
| Operating Temperature <sup>1</sup>     | -4° to 140° F (-20° to 60° C)   |
| Storage Temperature                    | 6 months: 14° to 77° F (-10° to 25° C)<br>3 months: -4° to 113° F (-20° to 45° C) |

| Product Dimensions                |   |
|-----------------------------------|---|
| Dimensions (W x H x D)            | 23 x 28.5 x 8.5 in (30 in H w/terminals) /<br>3.2 ft <sup>3</sup> (584 x 724 x 215.5 mm / 0.10 m <sup>3</sup> ) |
| Weight                            | 160 lb (73 kg)  |
| Wall Mount Dimensions (W x H x D) | 17.5 x 22.69 x .95 in (444.5 x 576.2 x 24 mm)   |

| Battery Specifications |  |
|------------------------|--|
| Self-Discharge Rate    | < 1% per month (when off)                    |
| Cycle Life             | 10,000+ cycles<br>(@ 80% DOD)                |
| Memory Effect          | None   |
| IP Rating              | IP65   |
| Warranty               | 10 years                                     |
| Mounting               | Wall mount only                              |
| Efficiency Rating      | 96%  |
| Communications         | CANBUS                                       |
| Certifications         | UL 1642, UL 1973,<br>UN 3480 and UN DOT 38.3 |

| Capabilities   |   |
|----------------|---|
| Terminals      | 3/8 in (10 mm)  |
| Battery Cables | 4/0 Parallel<br>Connections – Up to 4 batteries<br>per string |

Refer to the Integration Guide section of the [SimpliPHI Product Documentation](#) web page for specific wiring instructions, inverter and/or charge controller settings. Must be followed to maintain warranty.

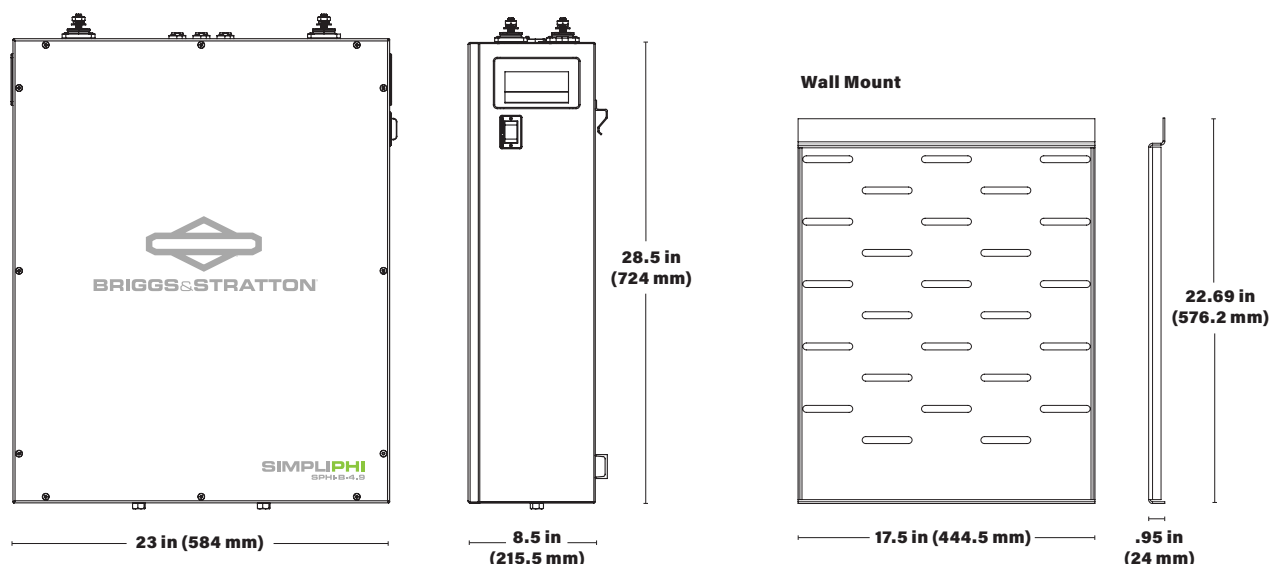

<sup>1</sup>Maximum operating ranges. Refer to Installation Manual for recommended conditions. All specifications listed are typical/nominal and subject to change without notice.

Engineered in California, USA. Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Please visit [BRIGGSandSTRATTON.com](#) for the latest information.  
BS1383 - 5/22

**BRIGGS & STRATTON**  
POST OFFICE BOX 702  
MILWAUKEE, WI 53201 USA

Copyright © 2022 Briggs & Stratton. All rights reserved.